

Auxiliary top plate type PP/MP

REF 14.07

{ERREUR : balise [PRESTATION_CRITERE_ASOUST] inconnue}

Stabil top plate / Rugged construction

Grinding, Turning


. To use with circular magnetic chuck model FM
. Pole pitch: steel 3 mm - brass 1.5 mm (or 1.5+0.5)
Laminated blocks do not have a magnetic field of their own, but are able to transmit the magnetic flux of the chuck towards the workpiece, by positioning them with the laminations being parallel to those of the chuck pole plate. They are used to protect the pole plate when carrying out difficult machining operations.

Options

Any other dimensions on request

Other pole pitch

Special machining

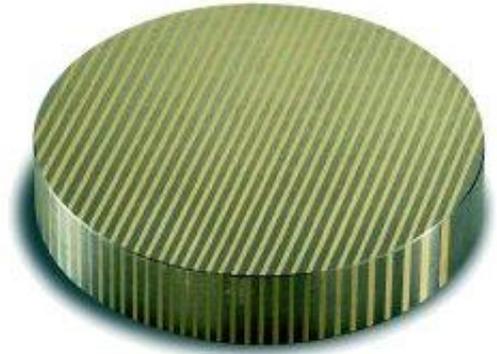

Reference	Poids en kg	A	B
14.07.100	2.6	100	21
14.07.130	3.5	130	21
14.07.150	4.2	150	21
14.07.200	5.9	200	21
14.07.250	7.6	250	21
14.07.300	8.9	300	21

