

# Orientable magnetic tool type PMR


REF 17.22

{ERREUR : balise [PRESTATION\_CRITERE\_ASOUST] inconnue}

Rugged construction / Waterproof construction / Longer life / Sure / Effective / Rugged & compact construction


## Positioning

- . Angle from 45° to 270°
- . Robust construction
- . 2 magnetic faces
- Model (N) for clean pieces
- Model (R) for rough pieces
- Model (T) for round pieces
- Model (B) for high magnetic force
- Model (TC) with V pole pieces and On/Off mechanism

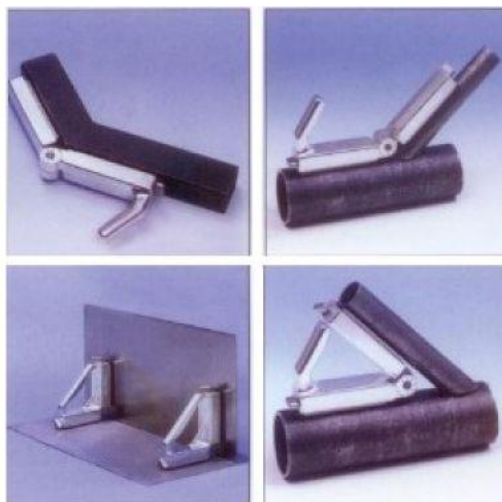

## Options

| Reference   | Poids en kg | A   | B   | C  | D         |
|-------------|-------------|-----|-----|----|-----------|
| 17.22.130N  | 0.75        | 130 | 130 | 38 | 300N      |
| 17.22.180N  | 1.5         | 180 | 180 | 45 | 650N      |
| 17.22.260N  | 2           | 260 | 180 | 45 | 900N      |
| 17.22.130R  | 0.8         | 130 | 130 | 38 | 400N      |
| 17.22.180R  | 1.55        | 180 | 180 | 45 | 900N      |
| 17.22.260R  | 2.1         | 260 | 180 | 45 | 900/1300N |
| 17.22.130T  | 0.9         | 130 | 130 | 38 | 250N      |
| 17.22.180T  | 1.7         | 180 | 180 | 45 | 400N      |
| 17.22.260T  | 2.2         | 260 | 180 | 45 | 400/600N  |
| 17.22.150TC | 1.7         | 150 | 150 | 38 | 400N      |
| 17.22.205TC | 2,1         | 205 | 205 | 48 | 500N      |

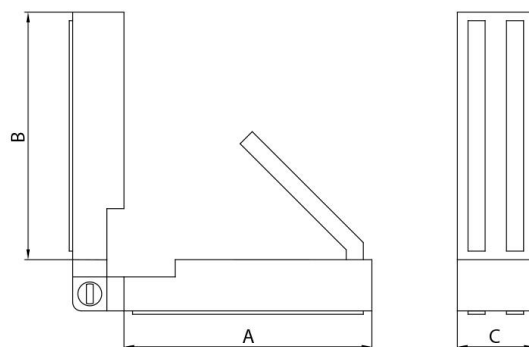

D = Force